


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

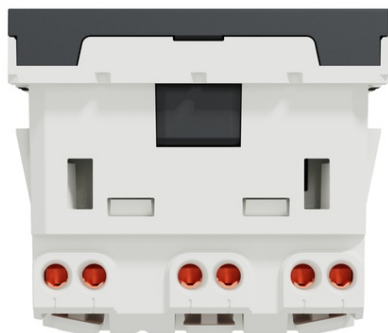

**SCHNEIDER PRIZA DUBLA, NEW UNICA, MECANISM, 2P E, 16A,  
FRENCH, OBTURATSAU, TERMINAL FARA SURUBURI, IP3X, VOPSIT,  
ANTRACIT**

Schneider Electric New Unica socket-outlet NU306954S is a mechanism in color anthracite with 2 socket outlets. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. And this device is French standard. The dielectric strength level, the voltage that the material this socket-outlet uses can withstand for a given wall thickness before dielectric breakdown, is 2000V. Its rated current is 16A. Clip-in this socket-outlet for the fixation. It is 45 mm in width, It is 90 mm in height, 39.4 mm in depth with an embedding depth of 30 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. It benefits from an elegant matt finishing, constituting an added-value for your interior design. The IP rating of this device is IP21D which is very high. Besides, it reaches IK04 protection level, which can help protect against impact. This socket-outlet has screwless terminals connection terminals. Being made of PC material, this skin is reliable and resistant. It obtained NF certificate. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Power supply

Product or component type - Socket-outlet

device presentation - Mechanism

Socket number - 2

Outlet poles configuration - 2P + E

outlet standard - French

Outlet standard description - Pin earth

Ground lug position - 45A° ground lug

Complementary

Cover type - With shutter

device mounting - Flush

Rated current - 16 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 4 modules

Fixing mode - Clip-in

Colour tint - Anthracite (RAL 7021)

Pilot light - Red indicator lamp, colour: red, current consumption: 1.5 mA

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: flexible

0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

Surface finish - Painted

Quantity per set - Set of 1 without packaging

Standards - IEC 60884-1

NF C 61-314

Product certifications - NF

Embedding depth - 30 mm

Depth - 39.4 mm

Width - 45 mm

Height - 90 mm

Net weight - 0.077 kg

Surface treatment - Painted

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK04

IP degree of protection - IP3x

Environmental characteristic - Acetone

Bleach

UV resistant

Petrol

Oil

|  |  |
|--|--|
|  | Alcohol<br>Window-cleaning fluid<br>Liquid soap<br>Packing Units<br>Unit Type of Package 1 - PCE<br>Number of Units in Package 1 - 1<br>Package 1 Height - 4 cm<br>Package 1 Width - 4.5 cm<br>Package 1 Length - 9 cm<br>Package 1 Weight - 72 g<br>Unit Type of Package 2 - BB1<br>Number of Units in Package 2 - 5<br>Package 2 Height - 12 cm<br>Package 2 Width - 12.5 cm<br>Package 2 Length - 18.5 cm<br>Package 2 Weight - 428 g<br>Unit Type of Package 3 - S01<br>Number of Units in Package 3 - 10<br>Package 3 Height - 15 cm<br>Package 3 Width - 15 cm<br>Package 3 Length - 40 cm<br>Package 3 Weight - 1.06 kg<br>Pret: 0,00 lei (TVA inclus)<br><br>Detalii online: <a href="https://www.materialeelectrice.ro/priza-dubla-new-unica-mecanism-2p-e-16a-french-obturatsau-terminal-fara-suruburi-ip3x-vopsit-antracit-318831">https://www.materialeelectrice.ro/priza-dubla-new-unica-mecanism-2p-e-16a-french-obturatsau-terminal-fara-suruburi-ip3x-vopsit-antracit-318831</a> |
|--|--|