


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

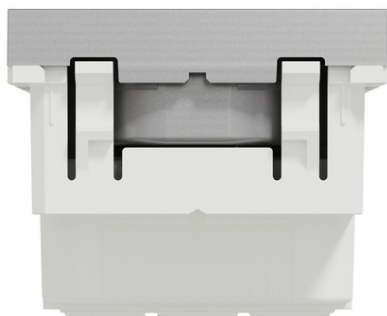

### **SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16A, SCREWLESS, OBTURATSAUOSU, ALUMINIU**

Schneider Electric New Unica socket-outlet NU305930E is a mechanism in color aluminium. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. This device respects the French standard. The dielectric strength of this socket-outlet is 2000V. Its rated current is 16A. The device's fixing mode is clip-in. It is 45 mm in width, It is 45 mm in height, 37 mm in depth with an embedding depth of 27 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. It reaches IP20 degree of protection which is very high. It reaches IK01 protection level, which can help protect against impact. This socket-outlet has screwless terminals connection terminals. Being made of ASA + PC material, this skin is reliable and resistant. This socket-outlet is FR.ME63.B02375 AC certified. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.

Main  
Range - New Unica  
Device application - Power supply  
Product or component type - Socket-outlet  
device presentation - Mechanism  
Socket number - 1  
Outlet poles configuration - 2P + E  
outlet standard - French  
Outlet standard description - Pin earth  
Complementary  
Cover type - With shutter  
device mounting - Flush  
Rated current - 16 A  
[Ue] rated operational voltage - 250 V  
Network type - AC  
Network frequency - 50/60 Hz  
Number of modules - 2 modules  
Fixing mode - Clip-in  
Colour tint - Aluminium  
Connections - terminals - Screwless terminals  
Cable cross section - 0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: flexible  
0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: rigid  
Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6  
Electrical durability - 10000 cycles, cos phi = 0.8  
Insulation resistance - > 5 MOhm at 500 V  
Dielectric strength - 2000 V  
Material - PC; mechanism cover  
PC (polycarbonate) GF10 FR: casing  
Surface finish - Painted  
Quantity per set - Set of 1 flow-pack  
Standards - IEC 60884-1  
UNE 20315-1-1  
UNE 20315-1-2  
NF C 61-314  
Product certifications - AENOR  
NF  
Embedding depth - 27 mm  
Depth - 37 mm  
Width - 45 mm  
Height - 45 mm  
Net weight - 0.033 kg  
Surface treatment - Painted  
Resistance to chemical agents - Resistant to alcohol (70 %)  
Resistant to alcohol (96 %)  
Resistant to A-Lactic Acid  
Resistant to diluted quaternary ammonium  
Resistant to diluted bleach  
Resistant to diluted ammonia  
Resistant to soapy water  
Resistant to crystal cleaner  
Resistant to hydrogen peroxide 10 volumes  
Resistant to hexane  
Environment  
Ambient air temperature for operation - -5 to 35 A°C  
Ambient air temperature for storage - -5 to 50 A°C  
IK degree of protection - IK04  
IP degree of protection - IP4X  
Environmental characteristic - Alcohol  
UV resistant  
Bleach  
Liquid soap  
Oil  
Window-cleaning fluid

Acetone  
Petrol  
Packing Units  
Unit Type of Package 1 - PCE  
Number of Units in Package 1 - 1  
Package 1 Height - 3.5 cm  
Package 1 Width - 4.5 cm  
Package 1 Length - 4.5 cm  
Package 1 Weight - 31.0 g  
Unit Type of Package 2 - BB1  
Number of Units in Package 2 - 10  
Package 2 Height - 5.5 cm  
Package 2 Width - 14.0 cm  
Package 2 Length - 26.0 cm  
Package 2 Weight - 381.0 g  
Unit Type of Package 3 - S04  
Number of Units in Package 3 - 240  
Package 3 Height - 30.0 cm  
Package 3 Width - 40.0 cm  
Package 3 Length - 60.0 cm  
Package 3 Weight - 9.793 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/french-priza-new-unica-2pe-16a-screwless-obturatsauosu-aluminiu-318918>