


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

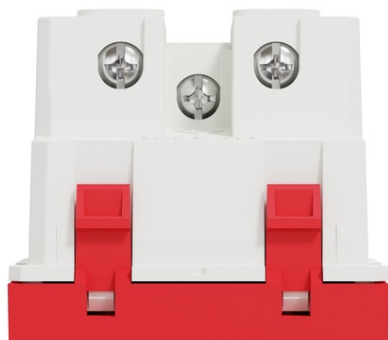

SCHNEIDER ISRAEL PRIZA, NEW UNICA, 2PE, 2 MODULE, ROSU

Schneider Electric New Unica socket-outlet NU304703 is a mechanism in color red. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. This device respects the special socket-outlet standard. The dielectric strength level, namely the voltage that the material this socket-outlet uses can withstand for a given wall thickness before dielectric breakdown or electrical discharge, is 2000V. Its rated current is 16A. The device's fixing mode is clip-in. It is 45 mm in width, It is 45 mm in height, and 34.25 mm in depth with an embedding depth of 14.52 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. It reaches IP20 degree of protection which is very high. Besides, it reaches IK01 protection level, which can help protect against impact. This socket-outlet has screw terminals connection terminals. The socket-outlet is made of ASA + PC, making it resistant and durable. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Power supply

Product or component type - Socket-outlet

device presentation - Mechanism

Socket number - 1

Outlet poles configuration - 2P + E

outlet standard - European

Outlet standard description - Displaced earth

Complementary

Cover type - With shutter

device mounting - Flush

Rated current - 16 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 2 modules

Fixing mode - Clip-in

Colour tint - Red (Pantone 1795C)

Connections - terminals - Screw terminals

Cable cross section - 0.5-4 mm² - cable stiffness: flexible

0.5-4 mm² - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

PC (polycarbonate) GF10 FR: casing

Surface finish - Glossy

Quantity per set - Set of 1 flow-pack

Standards - IEC 60884-1

Product certifications - ISI

Embedding depth - 30 mm

Depth - 40 mm

Width - 45 mm

Height - 45 mm

Net weight - 0.033 kg

Surface treatment - Antibacterial

Resistance to chemical agents - Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK01

IP degree of protection - IP21D

Environmental characteristic - Window-cleaning fluid

Alcohol

UV resistant

Bleach

Acetone

Oil

Liquid soap

Petrol

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 4.05 cm

Package 1 Width - 4.5 cm

Package 1 Length - 4.5 cm
Package 1 Weight - 32.5 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 4 cm
Package 2 Width - 9.35 cm
Package 2 Length - 22.5 cm
Package 2 Weight - 373 g
Unit Type of Package 3 - S03
Number of Units in Package 3 - 250
Package 3 Height - 30 cm
Package 3 Width - 30 cm
Package 3 Length - 40 cm
Package 3 Weight - 9766 kg
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/israel-priza-new-unica-2pe-2-module-rosu-318933>