


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

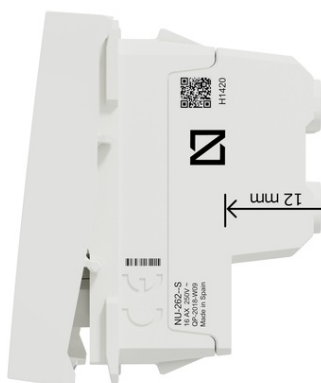

SCHNEIDER INTRERUPATOR, NEW UNICA, MECANISM, 2-POLE 1-WAY, 16AX, 2 MODULE, SCREW TERMINALS, IP4X, ALB

Schneider Electric New Unica switch NU326218S is a mechanism in color white. This is a 2-pole 1-way switch. The fixing mode of this device is clip-in. Its rated current is 16AX. It is 45 mm in width, 45 mm in height and 37.75 mm in depth with an embedding depth of 24.65 mm. The surface finish is glossy, delivering an elegant and high-end feeling to a room. The IP rating of this device is IP21D which is very high. Its connection terminals are screw terminals. The switch is made of Cu.Zn5 Ag, PC (polycarbonate) GF10 FR, thermoplastic ABS-UV stabilized, making it resistant and durable. This switch is AENOR, CE, EAC, NF certified. Being environmentally friendly, this switch is a green premium product. This switch is mercury free and heavy metal free, which takes care of the environment and your health as always. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range of product - New Unica
Product or component type - Switch
device presentation - Mechanism
Technology type - Electromechanical
Switch function - 2-pole 1-way
Number of rocker - 1
Device application - Light control
Colour tint - White (RAL 9003)
Type of packing - Flow-pack
Complementary
Rated current - 16 AX
[Ue] rated operational voltage - 250 V
Network type - AC
Network frequency - 50/60 Hz
Electrical durability - 20000 cycles, cos phi = 0.6
Insulation resistance - > 5 MOhm at 500 V
Dielectric strength - 2000 V
Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3
Opening distance - > 3 mm
Actuator - Rocker
Number of modules - 2 modules
Pilot light - LED, colour: red, current consumption: 1.5 mA
Connections - terminals - Screw terminals
Cable cross section - 0.6-4 mm² rigid cable
0.6-4 mm² flexible cable
Material - CuZn5 Ag: terminals
Thermoplastic ABS-UV stabilised: mechanism rocker
PC (polycarbonate) GF10 FR: casing
Marking - 0 - 1
Surface finish - Glossy
Fixing mode - Clip-in
Width - 45 mm
Height - 45 mm
Depth - 37.75 mm
Embedding depth - 24.65 mm
Net weight - 0.0248 kg
Ambient air temperature for operation - -5 to 40 A°C
Ambient air temperature for storage - -5 to 50 A°C
Standards - LV directive
IEC 60669-1
Product certifications - CE
AENOR
EAC
NF
VDE
Resistance to chemical agents - Resistant to alcohol (70 %)
Resistant to alcohol (96 %)
Resistant to A-Lactic Acid
Resistant to diluted quaternary ammonium
Resistant to diluted bleach
Resistant to diluted ammonia
Resistant to soapy water
Resistant to crystal cleaner
Resistant to hydrogen peroxide 10 volumes
Resistant to hexane
Environment
IP degree of protection - IP4X
IK degree of protection - IK04
Environmental characteristic - Oil
UV resistant
Acetone
Liquid soap
Window-cleaning fluid

Petrol
Alcohol
Bleach
Packing Units
Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 3.5 cm
Package 1 Width - 4.5 cm
Package 1 Length - 4.5 cm
Package 1 Weight - 27.0 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 8.0 cm
Package 2 Width - 18.0 cm
Package 2 Length - 18.5 cm
Package 2 Weight - 355.0 g
Unit Type of Package 3 - S02
Number of Units in Package 3 - 20
Package 3 Height - 15.0 cm
Package 3 Width - 30.0 cm
Package 3 Length - 40.0 cm
Package 3 Weight - 1.015 kg
Pret: 44,18 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/intrerupator-new-unica-mecanism-2-pole-1-way-16ax-2-module-screw-terminals-ip4x-alb-319011>