


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

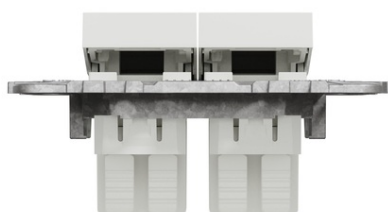

### **SCHNEIDER BUTON DUBLU, NEW UNICA, INTERMEDIATE, 10AX, 2 MODULE, TERMINAL FARA SURUBURI, NETRATAT, IP4X, ALB**

Schneider Electric New Unica switch NU521518 is a mechanism with zamak fixing frame in color white with 2 rockers. This is an intermediate switch. The device's fixing mode is screws or claws. Its rated current is 10AX. It is 74.5 mm in width, It is 74.5 mm in height, 37.75 mm in depth with an embedding depth of 24.65 mm. The surface finish is glossy, delivering an elegant and high-end feeling to a room. The IP rating of this device is IP21D which is very high. This switch has screwless terminals connection terminals. Being made of Cu.Zn15, Cu.Zn5 Ag, PBT (polybutylene terephthalate) GF31, PC (polycarbonate) GF10 FR, thermoplastic ABS-UV stabilized, zamak material, this switch is quite reliable and resistant. It obtained AENOR, CE, EAC, NF certificate. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.

Main

Range of product - New Unica

Product or component type - Switch

device presentation - Mechanism with fixing frame

Technology type - Electromechanical

Switch function - Intermediate

Number of rocker - 2

Device application - Light control

Provided equipment - Fixing frame

Colour tint - White (RAL 9003)

Type of packing - Flow-pack

Complementary

Rated current - 10 AX

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Electrical durability - 20000 cycles, cos phi = 0.6

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3

Opening distance - > 3 mm

Actuator - Rocker

Number of modules - 2 modules

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm<sup>2</sup> rigid cable

0.5-2.5 mm<sup>2</sup> flexible cable

Material - CuZn5 Ag: fixed terminals

CuZn15: mobile contact

PBT (polybutylene terephthalate) GF31: release button

Zamak: fixing frame

Thermoplastic ABS-UV stabilised: mechanism rocker

PC (polycarbonate) GF10 FR: casing

Marking - Without marking

Surface finish - Glossy

specific treatment - integrated within the material - Untreated

Fixing mode - Screws or claws

Width - 74.5 mm

Height - 74.5 mm

Depth - 37.75 mm

Embedding depth - 24.65 mm

Net weight - 0.0763 kg

Ambient air temperature for operation - -5-40 A°C

Ambient air temperature for storage - -5-50 A°C

Standards - IEC 60669-1

LV directive

Product certifications - CE

AENOR

EAC

NF

VDE

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

IP degree of protection - IP4X

IK degree of protection - IK04

Environmental characteristic - Oil

UV resistant  
Acetone  
Liquid soap  
Window-cleaning fluid  
Petrol  
Alcohol  
Bleach  
Packing Units  
Unit Type of Package 1 - PCE  
Number of Units in Package 1 - 1  
Package 1 Height - 4.000 cm  
Package 1 Width - 7.000 cm  
Package 1 Length - 7.000 cm  
Package 1 Weight - 75.000 g  
Unit Type of Package 2 - BB1  
Number of Units in Package 2 - 10  
Package 2 Height - 8.000 cm  
Package 2 Width - 20.000 cm  
Package 2 Length - 22.500 cm  
Package 2 Weight - 844.000 g  
Unit Type of Package 3 - P06  
Number of Units in Package 3 - 160  
Package 3 Height - 75.000 cm  
Package 3 Width - 80.000 cm  
Package 3 Length - 60.000 cm  
Package 3 Weight - 25.408 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/buton-dublu-new-unica-intermediate-10ax-2-module-terminal-fara-suruburi-netratat-ip4x-alb-319056>