


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

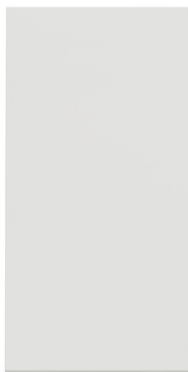

SCHNEIDER CAP SCARA, NEW UNICA, 10 A, 1 MODULE, ALB

Schneider Electric New Unica switch NU310318SC is a mechanism in color white. This is a 1-pole 2-way switch. The device's fixing mode is clip-in. Its rated current is 10A. It is 22.5 mm in width, It is 45 mm in height, 34 mm in depth with an embedding depth of 22 mm. The IP rating of this device is IP20. This switch has screw terminals connection terminals. The switch is made of ASA + PC, making it as resistant as possible. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.

Main
Range of product - New Unica
Product or component type - Switch
device presentation - Mechanism
Technology type - Electromechanical
Switch function - 1-pole 2-way
Number of rocker - 1
Device application - Light control
Colour tint - White (RAL 9003)
Type of packing - Flow-pack
Complementary
Rated current - 10 A
10 AX
[Ue] rated operational voltage - 250 V
250 V
Network type - AC
AC
Network frequency - 50/60 Hz
50/60 Hz
Electrical durability - 10000 cycles
20000 cycles, cos phi = 0.6
Insulation resistance - > 5 MOhm at 500 V
Dielectric strength - 2000 V
Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3
Condition of use - Indoor
Opening distance - > 3 mm
Actuator - Rocker
Number of modules - 1 module
Connections - terminals - Screw terminals
Cable cross section - 0.5-2.5 mm² rigid cable
0.5-2.5 mm² flexible cable
Material - ASA + PC: mechanism cover
ABS (acrylonitrile butadiene-styrene): mechanism cover
Surface finish - Glossy
specific treatment - integrated within the material - Untreated
Fixing mode - Clip-in
Width - 22.5 mm
Height - 45 mm
Depth - 34.25 mm
Embedding depth - 21.15 mm
Net weight - 0.0211 kg
Ambient air temperature for operation - -5 to +40 A°C
Ambient air temperature for storage - -5 to +50 A°C
Standards - EN 60669-1
LV directive
EMC directive
Product certifications - CE
AENOR
EAC
NF
VDE
Resistance to chemical agents - Resistant to alcohol (70 %)
Resistant to alcohol (96 %)
Resistant to A-Lactic Acid
Resistant to diluted quaternary ammonium
Resistant to diluted bleach
Resistant to diluted ammonia
Resistant to soapy water
Resistant to crystal cleaner
Resistant to hydrogen peroxide 10 volumes
Resistant to hexane
Environment
IP degree of protection - IP4X
IK degree of protection - IK04
Environmental characteristic - Oil
UV resistant
Alcohol
Liquid soap
Bleach

	<div>Acetone</div> <div>Petrol</div> <div>Window-cleaning fluid</div> <div>Packing Units</div> <div>Unit Type of Package 1 - PCE</div> <div>Number of Units in Package 1 - 1</div> <div>Package 1 Height - 3.5 cm</div> <div>Package 1 Width - 2.25 cm</div> <div>Package 1 Length - 4.5 cm</div> <div>Package 1 Weight - 18 g</div> <div>Unit Type of Package 2 - BB1</div> <div>Number of Units in Package 2 - 20</div> <div>Package 2 Height - 8.2 cm</div> <div>Package 2 Width - 17.7 cm</div> <div>Package 2 Length - 18.5 cm</div> <div>Package 2 Weight - 444 g</div> <div>Unit Type of Package 3 - S04</div> <div>Number of Units in Package 3 - 400</div> <div>Package 3 Height - 30 cm</div> <div>Package 3 Width - 40 cm</div> <div>Package 3 Length - 60 cm</div> <div>Package 3 Weight - 9.583 kg</div> <div>Pret: 0,00 lei (TVA inclus)</div> <div>Detalii online: https://www.materialeelectrice.ro/cap-scara-new-unica-10-a-1-module-alb-319102</div>
--	---