


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

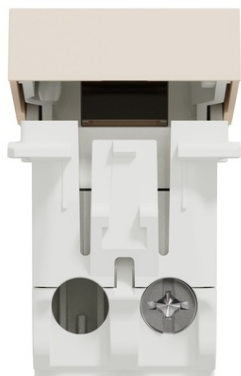

### **SCHNEIDER CAP SCARA, NEW UNICA, 10 A, 1 MODULE, BEI**

Schneider Electric New Unica switch NU310344SC is a mechanism in color beige. This is a 1-pole 2-way switch. The fixing mode of this device is clip-in. Its rated current is 10A. It is 22.5 mm in width, 45 mm in height and 34 mm in depth with an embedding depth of 22 mm. It reaches IP20 degree of protection which is very high. Its connection terminals are screw terminals. The switch is made of ASA + PC, making it as resistant as possible. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range of product - New Unica

Product or component type - Switch

device presentation - Mechanism

Technology type - Electromechanical

Switch function - 1-pole 2-way

Number of rocker - 1

Device application - Light control

Colour tint - Beige (RAL 1013)

Type of packing - Flow-pack

Complementary

Rated current - 10 A

10 AX

[Ue] rated operational voltage - 250 V

250 V

Network type - AC

AC

Network frequency - 50/60 Hz

50/60 Hz

Electrical durability - 10000 cycles

20000 cycles, cos phi = 0.6

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3

Condition of use - Indoor

Opening distance - > 3 mm

Actuator - Rocker

Number of modules - 1 module

Connections - terminals - Screw terminals

Cable cross section - 0.5-2.5 mm<sup>2</sup> rigid cable

0.5-2.5 mm<sup>2</sup> flexible cable

Material - ASA + PC: mechanism cover

ABS (acrylonitrile butadiene-styrene): mechanism cover

Surface finish - Glossy

specific treatment - integrated within the material - Untreated

Fixing mode - Clip-in

Width - 22.5 mm

Height - 45 mm

Depth - 34.25 mm

Embedding depth - 21.15 mm

Net weight - 0.0211 kg

Ambient air temperature for operation - -5 to 40 A°C

Ambient air temperature for storage - -5 to 50 A°C

Standards - EN 60669-1

LV directive

EMC directive

Product certifications - CE

AENOR

EAC

NF

VDE

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

IP degree of protection - IP4X

IK degree of protection - IK04

Environmental characteristic - Window-cleaning fluid

Alcohol

Oil

UV resistant

Bleach

	<div>Petrol</div> <div>Liquid soap</div> <div>Acetone</div> <div>Packing Units</div> <div>Unit Type of Package 1 - PCE</div> <div>Number of Units in Package 1 - 1</div> <div>Package 1 Height - 3.5 cm</div> <div>Package 1 Width - 2.25 cm</div> <div>Package 1 Length - 4.5 cm</div> <div>Package 1 Weight - 18 g</div> <div>Unit Type of Package 2 - BB1</div> <div>Number of Units in Package 2 - 20</div> <div>Package 2 Height - 8.2 cm</div> <div>Package 2 Width - 17.7 cm</div> <div>Package 2 Length - 18.5 cm</div> <div>Package 2 Weight - 444 g</div> <div>Unit Type of Package 3 - S03</div> <div>Number of Units in Package 3 - 160</div> <div>Package 3 Height - 30 cm</div> <div>Package 3 Width - 30 cm</div> <div>Package 3 Length - 40 cm</div> <div>Package 3 Weight - 3.993 kg</div> <div>Pret: 0,00 lei (TVA inclus)</div> <div>Detalii online: <a href="https://www.materialeelectrice.ro/cap-scara-new-unica-10-a-1-module-bej-319103">https://www.materialeelectrice.ro/cap-scara-new-unica-10-a-1-module-bej-319103</a></div>
--	---