


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

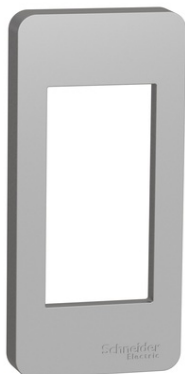

SCHNEIDER PLACA ORNAMENT, UNICA, UN MODUL, ALUMINIU

Schneider Electric New Unica cover frame NU200130 is in color aluminium. The cover frame is made of PBT (polybutylene terephthalate), thermoplastic ABS-UV stabilised, making it as resistant as possible. This cover frame has 1 gang. Besides, it reaches IK04 protection level, which can help protect against impact. Also, it is environment-friendly, with UV resistant, acetone, alcohol, ammonia, bleach, liquid soap, oil, petrol, window-cleaning fluid reached. This cover frame is SVHC (substances of very high concern) free too. This cover frame belongs to Unica aesthetic group. What's more, it well satisfied the standard of IEC 60669-1, IEC 60884-1. It is 36 mm in width, 75 mm in height, 9 mm in depth. Besides it is halogen free, which is good for your health. With 1 module, the fixing mode of this device is clip-in. And the product weighs 0.011 kg. Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Mounting

Product or component type - Cover frame

aesthetic name - Unica

Number of gangs - 1 gang

Installation direction - Horizontal

Type of frame - Single

Number of modules - 1 module

Fixing mode - Clip-in

Colour tint - Aluminium

Complementary

Provided equipment - Fixing frame

Material - Thermoplastic ABS-UV stabilised: cover frame

PBT (polybutylene terephthalate): fixing frame

Standards - IEC 60884-1

IEC 60669-1

Width - 36 mm

Height - 75 mm

Depth - 9 mm

Net weight - 0.011 kg

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

IK degree of protection - IK04

IP degree of protection - IP21D

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 1.5 cm

Package 1 Width - 3.5 cm

Package 1 Length - 7.5 cm

Package 1 Weight - 14.0 g

Unit Type of Package 2 - BB1

Number of Units in Package 2 - 10

Package 2 Height - 6.5 cm

Package 2 Width - 12.5 cm

Package 2 Length - 18.5 cm

Package 2 Weight - 198.0 g

Unit Type of Package 3 - S01

Number of Units in Package 3 - 40

Package 3 Height - 15.0 cm

Package 3 Width - 15.0 cm

Package 3 Length - 40.0 cm

Package 3 Weight - 1.006 kg

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/placa-ornament-unica-un-modul-aluminiu-319243>