


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

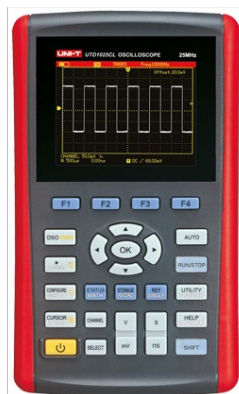

UNI-T OSCILOSCOP 25MHZ UTD1025CL UNI-T

Descriere:

- 1 canal - Banda de frecventa: 25 MHz - Rata de e^È™ antionare: 200 MSa / s - Timp de crestere: <= 14 ns - Memorare: 12 kpts - Sensibilitate pe verticala: 5 mV / div ~ 20V / div - Baza de timp: 10ns / div ~ 50s / div - Moduri sincronizare: Edge, puls, video, Slope - Interfata: miniUSB Specificatii multimetru: - Tensiune DC: 400.0mV / 4.000V / 40.00V / 400.0V; $\bar{A}, \bar{A} \pm (1\% + 5)$ - Tensiune AC: 400.0mV / 4.000V / 40.00V / 400.0V; $\bar{A}, \bar{A} \pm (1,2\% + 5)$ - Curent DC: 400.0 $\bar{A}$ $\bar{A} \frac{1}{4}$ A / 4000 $\bar{A}$ $\bar{A} \frac{1}{4}$ A; $\bar{A}, \bar{A} \pm (1,2\% + 5)$ - Curent AC : 400.0 $\bar{A}$ $\bar{A} \frac{1}{4}$ A / 4000 $\bar{A}$ $\bar{A} \frac{1}{4}$ A; $\bar{A}, \bar{A} \pm (2\% + 5)$ - Rezisten^È™a: 400 ohm / 4 kohm / 40 kohm / 400 kohm / 4 Mohm; $\bar{A}, \bar{A} \pm (1,2\% + 5)$ / 40 Mohm; $\bar{A}, \bar{A} \pm (1,5\% + 5)$ - Capacitate: 51.2 nF / 512 nF / 5.12 $\bar{A}$ $\bar{A} \frac{1}{4}$ F / 51.20 $\bar{A}$ $\bar{A} \frac{1}{4}$ F / 100 $\bar{A}$ $\bar{A} \frac{1}{4}$ F; $\bar{A}, \bar{A} \pm (3\% + 5)$ - Alimentare: baterie litiu 7.4V 3600mAh sau prin adaptor AC 100 ~ 240V 50 / 60Hz, ie^È™ ire 9V/4A Ecran LCD color 3.5 inch, 320 x 240 Greutate: 0.9 kg Dimensiuni: 199 x 118 x 49 mm

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/osciloscop-25mhz-utd1025cl-uni-t>