


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

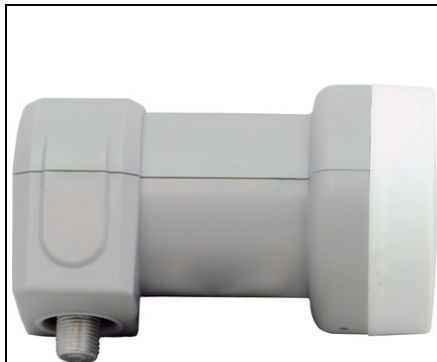

SCHRACK LNB SINGLE PENTRU 1 RECEIVER,D40MM

EAN-Code 9004840083842 Lungime 120,00mm Latime neta 55,00mm Inaltime 55,00mm
Masa neta 0,14kg. Temperatura minima a mediului ambiant -30°C Temperatura maxima
a mediului ambiant 60°C Feed diameter 40mm Receiving from DVB-S and DVB-S2
signals (HDTV compatible) Conexiune F- contacts nickel plated Numar de iesiri 1
Extendable weather protection cap no Input Frequency Range Low Band - 10.7 - 11.7
GHzHigh Band - 11.7 - 12.75 GHz Output Frequency Range Low Band - 950 ~ 1950
MHzHigh Band - 1100 ~ 2150 MHz Oscillation frequency Low Band - 9,75 GHz $\pm 1,5$
MHzHigh Band - 10.60 GHz ± 1.5 MHz Noise Figure Low Band - ≤ 1.0 dBHigh Band -
 ≤ 1.0 dB Cross Polar Isolation 20 dB (Min.) Gain 55 ~ 70dB (Typical) Linearity of gain $\pm$
0.5 dB / 27 MHz Reflector Type Offset L.O. Phase Noise 100 dBc / Hz (@ 100kHz) 50
dBc / Hz (@ 1kHz) 75 dBc / Hz (@ 10kHz) Image Rejection 45 dB (min). Output
VSWR(Ref. to 75 Ω) 2.5 : 1 (max.) Output Connector Type 75 Ω F-Connector
Polarization Control Voltage Range 11.5 ~ 14.0 V (Vertical Polarisation) 16.0 ~ 19.0 V
(Horizontal Polarization)Continuous 22 kHz $\pm$ 4 kHz (High Band Selection) Produs LNB-
uri
Pret: 37,01 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/lnb-single-pentru-1-receiver-d40mm-84013>