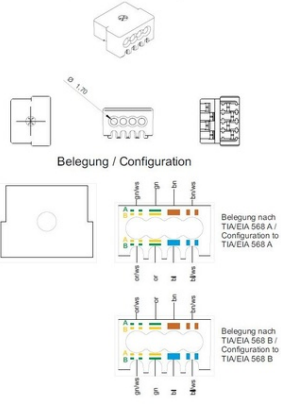


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

Zeichnung / Drawing  Belegung / Configuration Belegung nach TIA/EIA 568 A / Configuration to TIA/EIA 568 A Belegung nach TIA/EIA 568 B / Configuration to TIA/EIA 568 B	<u>SCHRACK MODUL RJ45 ECRANAT, CAT.6A 10GB POE+, PERFORMANCE LINE</u> EAN-Code 9004840566420 Lungime 36,50mm Latime neta 14,50mm Inaltime 20,80mm Masa neta 0,03kg. Temperatura minima a mediului ambient -40°C Temperatura maxima a mediului ambient 70°C Produs Modul conector Ecranaj ecranat Format SCHRACK SFB Conector standard IEC 60603-7-51 Categorie Cat.6a/10GB Class E<sub>A</sub> acc. to ISO/IEC 11801 Amendment 1/2 typical link length > 2m, in combination with a CP-cable: CP-Link typ. > 10m 10GbE is supported 4PPoE Da Cicluri de conectare 750 Insertion force 30N Conductor diameter solid 0,51-0,65mmAWG24/1 - AWG 22/1 Insulation diameter 5 - 9mm Reusable (Module) 5 cycles with the same diameter RoHS Conform cu directiva EU 2002/95/EC Housing Zinc diecast Strain-relief sliver Zinc diecast Surface nickel plated Shield spring Stainless steel PCB FR4 PCB finish HAL lead-free Material contacte Spring steel Contact finish 1,27µm / 50µin Au Insulation housing Light green (RAL6027) Contact support plate PC yellow (RAL1021) Dust protection cover PC clear IDC CuNi2Si IDC finish min. 3-6 µm (120-240µin) Sn Particularte ingress IP2X Water ingress IPX0 Impachetare Bio-degradable Contact resistance 20mΩ, Rezistenta izolatie 500MΩ, Voltage proof - contact-contac 1000 (DC)V Transfer Impedance @ 1 MHz = 100mΩ, @ 10 MHz = 200mΩ, @ 80 MHz = 1600mΩ, Porturi 1 Pret: 27,76 lei (TVA inclus) Detalii online: https://www.materialelectrice.ro/modul-rj45-ecranat-cat-6a-10gb-poe-performance-line-84078
--	---