
www.MATERIALE ELECTRICE.ro
Consiliere specializata

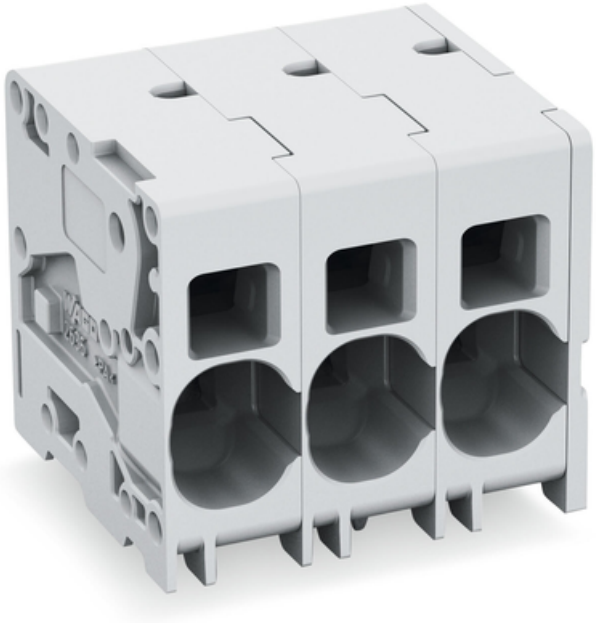

WAGO PCB TERMINAL BLOCK; 16 MM²; PIN SPACING 10 MM; 5-POLE; PUSH-IN CAGE CLAMP®; 16,00 MM²; BLACK

Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 1000; V
Tensiune nominala de supratensiune (III/3): 8; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 8; kV
Tesiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 8; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 600; V
Curent nominal UL (Use Group B): 66; A
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 66; A
Certificari: UL 1059;
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0.75 … 16 mm² / 18 … 4 AWG;
Fine-stranded conductor: 0.75 … 25 mm² / 18 … 4 AWG;
Fine-stranded conductor; with insulated ferrule: 0.75 … 16 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.75 … 16 mm²;
Fine-stranded conductor; with twin ferrule: 0.75 … 6 mm²;
Strip length: 18 … 20 mm / 0.71 … 0.79 inch;
Conductor connection direction to PCB: 0; °
Numar poli: 5;
Numar total de conexiuni: 5;
Total number of potentials: 5;

Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 51.6 mm / 2.031 inch;
Inaltime: 32.6 mm / 1.283 inch;
Inaltime de la fata: 28.6 mm / 1.126 inch;
Adancime: 29.1 mm / 1.146 inch;
Lungimea pinului de contact: 4; mm
Solder pin dimensions: 1.2 x 1 mm;
Diametrul de gaurire cu toleranta: 1.7 (+0.1) mm;
Tip montaj: Feed-through mounting;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, staggered;
Number of solder pins per potential: 3;
Culoare: black;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Greutate: 41,9; g
Temperatura lucru: -60 … +105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143765985;
Customs tariff number: 85369010000;
Pret: 78,52 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/pcb-terminal-block-16-mm2-pin-spacing-10-mm-5-pole-push-in-cage-clamp-16-00-mm2-black-130439