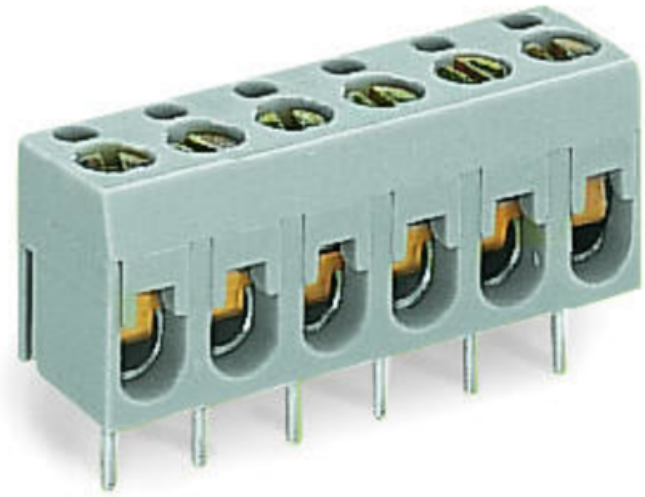


WAGO PCB TERMINAL BLOCK; 2.5 MM²; PIN SPACING 5 MM; 3-POLE; 2,50 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/2): 800; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Curent nominal: 16; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tehnologie conexiune: Screw clamp connection;
Tip actionare: Operating tool;
Solid conductor: 0.5 … 2.5 mm² / 20 … 14 AWG;
Fine-stranded conductor: 0.5 … 2.5 mm² / 20 … 14 AWG;
Strip length: 5 … 7 mm / 0.2 … 0.28 inch;
Conductor connection direction to PCB: 0; °
Numar poli: 3;
Numar total de conexiuni: 3;
Total number of potentials: 3;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 10/10.16 mm / 0.394/0.4 inch;
Latime: 10 mm / 0.394 inch;
Inaltime de la fata: 11 mm / 0.433 inch;
Adancime: 9 mm / 0.354 inch;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, in line;
Number of solder pins per potential: 1;
Culoare: gray;
Material group: I;

Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Greutate: 3,8; g
Temperatura lucru: -60 … +105 °C;
Tip ambalare: BOX;
Tara de origine: IN;
GTIN: 4045454539979;
Customs tariff number: 85369010000;
Pret: 5,20 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/pcb-terminal-block-2-5-mm2-pin-spacing-5-mm-3-pole-2-50-mm2-gray-130884