
www.MATERIALE ELECTRICE.ro
Consiliere specializata

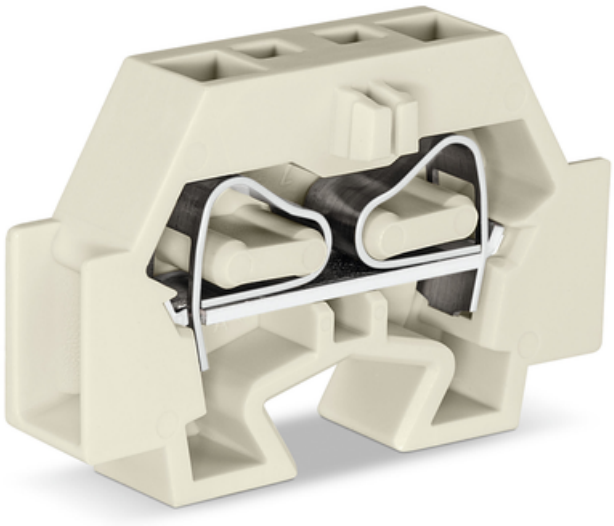

WAGO SPACE-SAVING, 2-CONDUCTOR END TERMINAL BLOCK; SUITABLE FOR EX E II APPLICATIONS; WITHOUT PUSH-BUTTONS; WITHOUT PROTRUDING SNAP-IN MOUNTING FOOT; FOR TERMINAL STRIPS WITH SNAP-IN MOUNTING FEET; 4 MM²; CAGE CLAMP®; 4,00 MM²; LIGHT GRAY

Tensiune nominala EN (Ex e II): 550; V
Curent nominal (Ex e II): 23; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0.5 … 4 mm² / 20 … 12 AWG;
Fine-stranded conductor: 0.5 … 4 mm² / 20 … 12 AWG;
Strip length: 9 … 10 mm / 0.35 … 0.39 inch;
Numar total de conexiuni: 2;
Total number of potentials: 1;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 7 mm / 0.276 inch;
Inaltime de la fata: 23 mm / 0.906 inch;
Adancime: 33.5 mm / 1.319 inch;
Design: horizontal;
Tip montaj: Snap-in mounting foot;
Marking level: Side marking;
Culoare: light gray;
Fire load: 0,077; MJ
Greutate: 4,2; g
Product Group: 9 (Std. Chassis Mt. Blocks);
Tip ambalare: BOX;
Tara de origine: CH;

GTIN: 4044918642002;
Customs tariff number: 85369010000;
Pret: 3,77 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/space-saving-2-conductor-end-terminal-block-suitable-for-ex-e-ii-applications-without-push-buttons-without-protruding-snap-in-mounting-foot-for-terminal-strips-with-snap-in-mounting-feet-4-mm2-cage-clamp-4-00-mm2-light-gray-131353