
www.MATERIALE ELECTRICE.ro
Consiliere specializata

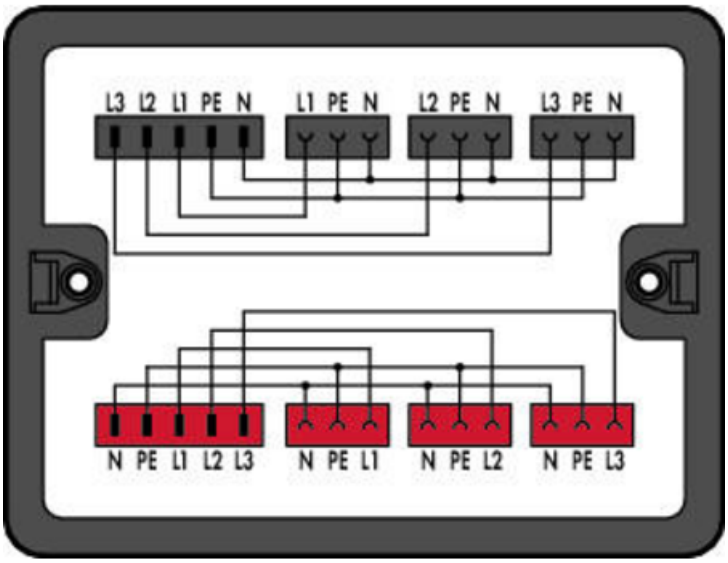

WAGO DISTRIBUTION BOX; THREE-PHASE TO SINGLE-PHASE CURRENT (400 V/230 V); 2 INPUTS; 6 OUTPUTS; COD. A, P; MIDI; BLACK

Note on Contact Resistance: approx. 1 m? of contact resistance approx. 0.25 m? contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 25; A
Tensiune nominala (III/3) 2: 250; V
Tensiune nominala de supratensiune (III/3) 2: 4; kV
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Latime: 190 mm / 7.48 inch;
Inaltime: 30 mm / 1.181 inch;
Adancime: 145 mm / 5.709 inch;
Interne Verdrahtung: 4; mm²
Coding: A;
Tip montaj: Wall, screw mount; Installation on mounting plate;
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed for use in open, easily accessible areas).;
Application: General mains applications;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Culoare: black;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Greutate: 389,8; g
Processing temperature: -5 … +40 °C;

Continuous operating temperature: -35 … +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ? 105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143294157;
Customs tariff number: 85366990990;
Pret: 317,67 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/distribution-box-three-phase-to-single-phase-current-400-v-230-v-2-inputs-6-outputs-cod-a-p-midi-black-133467