www.MATERIALE ELECTRICE.ro
Consiliere specializata

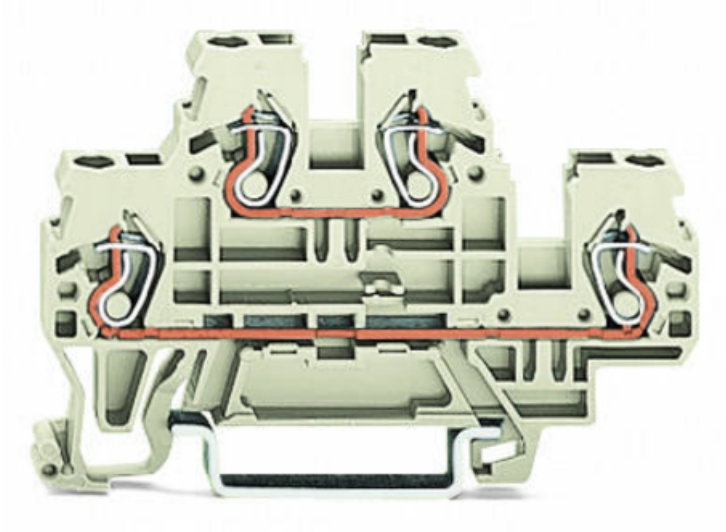

WAGO DOUBLE-DECK TERMINAL BLOCK; GROUND CONDUCTOR/THROUGH TERMINAL BLOCK; PE/L; SUITABLE FOR EX E II APPLICATIONS; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 2.5 MM²; CAGE CLAMP®; 2,50 MM²; LIGHT GRAY

Ratings per: IEC/EN 60947-7-1;
Curent nominal: 18; A
Tensiune nominala EN (Ex e II): 440; V
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0.08 … 2.5 mm² / 28 … 12 AWG;
Fine-stranded conductor: 0.08 … 4 mm² / 28 … 12 AWG;
Strip length: 6 … 7 mm / 0.24 … 0.28 inch;
Numar total de conexiuni: 4;
Total number of potentials: 2;
Numar nivele: 2;
Wiring type: Front-entry wiring;
Latime: 5 mm / 0.197 inch;
Inaltime from upper-edge of DIN-rail: 40 mm / 1.575 inch;
Adancime: 70 mm / 2.756 inch;
Design: horizontal;
Tip montaj: DIN-35 rail;
Potential marking: PE/L;
Marking level: Side marking;
Culoare: light gray;
Greutate: 13,9; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454323684;

Customs tariff number: 85369010000;
Pret: 28,75 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/double-deck-terminal-block-ground-conductor-through-terminal-block-pe-l-suitable-for-ex-e-ii-applications-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-cage-clamp-2-50-mm2-light-gray-136060