
www.MATERIALE ELECTRICE.ro
Consiliere specializata

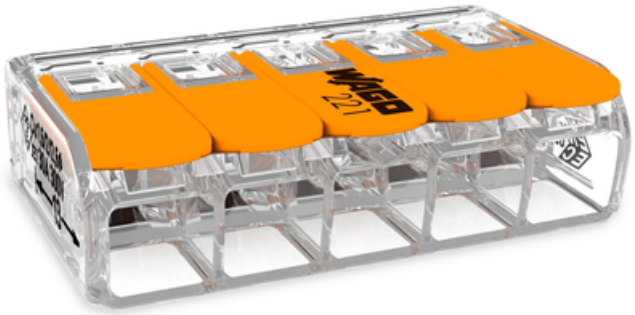

WAGO COMPACT SPLICING CONNECTOR; FOR ALL CONDUCTOR TYPES; MAX. 6 MM²; 5-CONDUCTOR; WITH LEVERS; TRANSPARENT HOUSING; SURROUNDING AIR TEMPERATURE: MAX 85°C (T85); 6,00 MM²; TRANSPARENT

Ratings per: EN 60664;
Tesiune nominala (II/2): 450; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 41; A
Legend (ratings): (II / 2) ? Overvoltage category II / Pollution degree 2;
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 30; A
Certificari: UL 486C;
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Lever;
Connectable conductor materials: Copper;
Nominal cross-section: 6 mm²;
Solid conductor: 0,5 … 6 mm² / 20 … 10 AWG;
Stranded conductor: 0,5 … 6 mm² / 20 … 10 AWG;
Fine-stranded conductor: 0,5 … 6 mm² / 20 … 10 AWG;
Strip length: 12 … 14 mm / 0.47 … 0.55 inch;
Numar total de conexiuni: 5;
Total number of potentials: 1;
Wiring type: Side-entry wiring;
Latime: 36,7 mm / 1.445 inch;
Inaltime: 10,1 mm / 0.398 inch;
Adancime: 21,1 mm / 0.831 inch;
Culoare: transparent;
Flammability class per UL94: V2;
Greutate: 7,1; g

Surrounding air temperature (operation): 85 °C;
Continuous operating temperature: 105 °C;
Temperature marking per EN 60998: T85;
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4055143715478;
Customs tariff number: 85369010000;
Pret: 7,12 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/compact-splicing-connector-for-all-conductor-types-max-6-mm2-5-conductor-with-levers-transparent-housing-surrounding-air-temperature-max-850c-t85-6-00-mm2-transparent-139894