
www.MATERIALE ELECTRICE.ro
Consiliere specializata

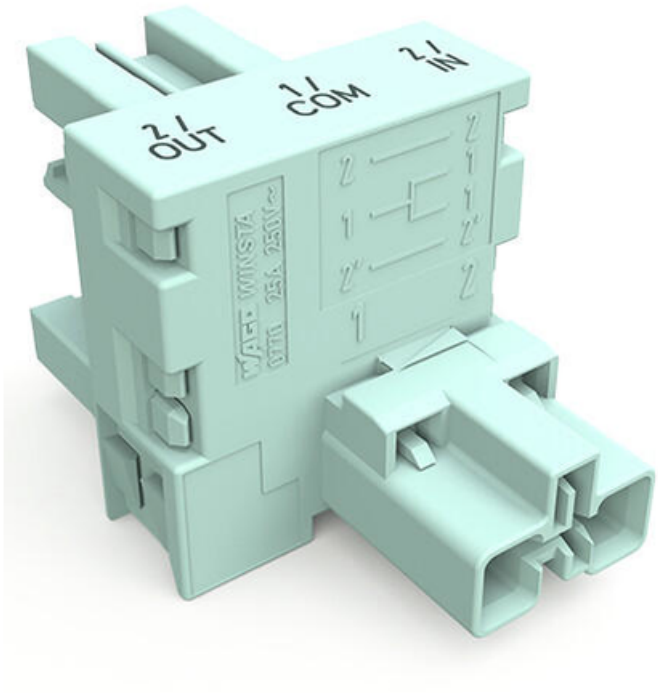

WAGO DISTRIBUTOR FOR STATUS QUERIES; 2-POLE/3-POLE; COD. B; 1 INPUT; 2 OUTPUTS; 3-POLE OUTPUT FOR STATUS QUERIES; LIGHT TURQUOISE

Note on Contact Resistance: approx. 1 m? of contact resistance approx. 0.25 m? contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 25; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 23; A
Numar poli: 3;
Total number of potentials: 3;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 30 mm / 1.181 inch;
Inaltime: 32,7 mm / 1.287 inch;
Adancime: 45,8 mm / 1.803 inch;
Coding: B;
Mating force of a plug-in connection: approx. 20 … 70 N (depending on pole number);
Retention force of a plug-in connection: When locked: > 80 N;
Unmating force of a plug-in connection: when unlocked: approx. 20 … 70 N (depending on pole number);
Number of mating cycles: ?200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm²/AWG 12);
Distributor type: h-distribution connector for status queries;
Marking: 2/OUT 1/COM 2/IN;
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed for use in open, easily accessible areas).;

Potential marking: 2/OUT 1/COM 2/IN;
Tip contact (pluggable connector): Socket/plug;
Connector (connection type): for pluggable connectors;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: yes;
Number of locking levers: 2;
Culoare: light turquoise;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Greutate: 17,3; g
Processing temperature: -5 … +40 °C;
Continuous operating temperature: -35 … +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ? 105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143767170;
Customs tariff number: 85366990990;
Pret: 58,80 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/distributor-for-status-queries-2-pole-3-pole-cod-b-1-input-2-outputs-3-pole-output-for-status-queries-light-turquoise-141568