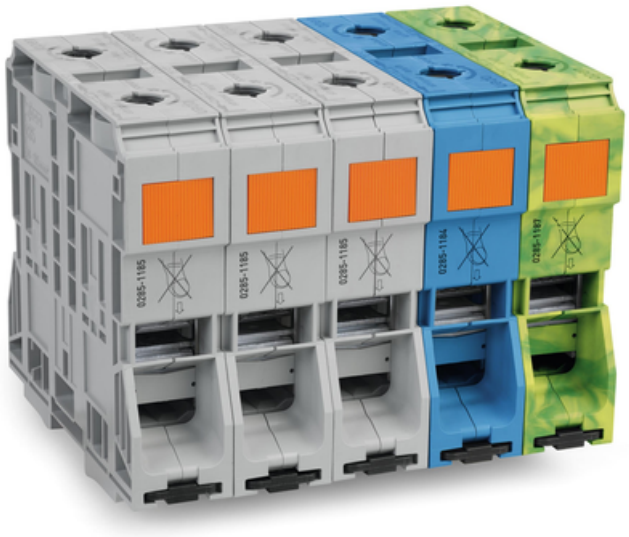


WAGO THREE PHASE SET; WITH 185 MM² HIGH-CURRENT TERMINAL BLOCK; ONLY FOR DIN 35 X 15 RAIL; COPPER; 185 MM²; POWER CAGE CLAMP; 185,00 MM²; GRAY, BLUE, GREEN-YELLOW

Ratings per: IEC/EN 60947-7-1;
Tesiune nominala (III/3): 1000; V
Tensiune nominala de supratensiune (III/3): 12; kV
Tensiune nominala (III/3) 2: 1500; V
Tensiune nominala de supratensiune (III/3) 2: 12; kV
Tehnologie conexiune: POWER CAGE CLAMP;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Nominal cross-section: 185 mm²;
Solid conductor: 50 … 185 mm² / 1/0 AWG … 350 kcmil;
Stranded conductor: 50 … 185 mm² / 1/0 AWG … 350 kcmil;
Fine-stranded conductor: 50 … 185 mm² / 1/0 AWG … 350 kcmil;
Fine-stranded conductor; with insulated ferrule: 50 … 150 mm² / 1/0 AWG … 250 kcmil;
Fine-stranded conductor; with uninsulated ferrule: 50 … 185 mm² / 1/0 AWG … 350 kcmil;
Strip length: 45 … 47 mm / 1.77 … 1.85 inch;
Numar total de conexiuni: 10;
Total number of potentials: 5;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Inaltime from upper-edge of DIN-rail: 116 mm / 4.567 inch;
Adancime: 130 mm / 5.118 inch;
Design: horizontal;
Tip montaj: DIN-35 rail;
Marking level: Side marking;
Culoare: gray, blue, green-yellow;

Material izolator: Polyamide 66 (PA 66);
Greutate: 2764,9; g
Product Group: 1 (Rail Mounted Terminal Blocks);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143074322;
Customs tariff number: 85369010000;
Pret: 1.451,01 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/three-phase-set-with-185-mm2-high-current-terminal-block-only-for-din-35-x-15-rail-copper-185-mm2-power-cage-clamp-185-00-mm2-gray-blue-green-yellow-141849