
www.MATERIALE ELECTRICE.ro
Consiliere specializata

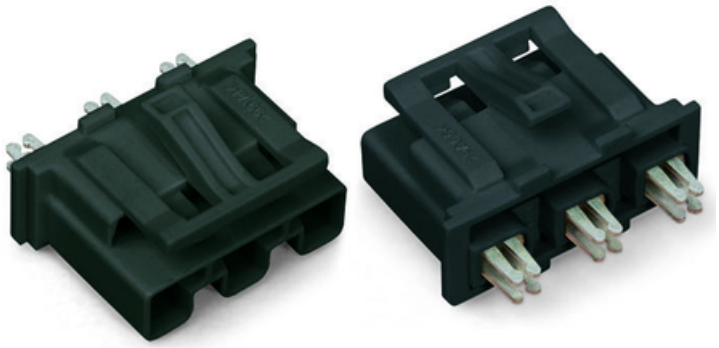

WAGO DEVICE CONNECTOR; 3-POLE; COD. A; PLUG MODULE WITH LOCKING LEVER; WHITE

Note on Contact Resistance: approx. 1 m? of contact resistance approx. 0.25 m? contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 25; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 23; A
Note (strip length): see also packaging or instructions;
Numar poli: 3;
Total number of potentials: 3;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 31,1 mm / 1.224 inch;
Inaltime: 24,8 mm / 0.976 inch;
Adancime: 16,55 mm / 0.652 inch;
Coding: A;
Mating force of a plug-in connection: approx. 20 … 70 N (depending on pole number);
Retention force of a plug-in connection: Locked: > 80 N;
Unmating force of a plug-in connection: Unlocked: approx. 20 … 70 N (depending on pole number);
Number of mating cycles: ?200, without resistive load100, with resistive load IN = 25 A, tested (4 mm²/AWG 12);
Protection type: IP20;
Application: General mains applications;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for current bar;

Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: yes;
Culoare: white;
Material izolator: Polyamide 66 (PA 66);
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Copper or copper alloy (surface-treated);
Fire load: 0,099; MJ
Greutate: 4,8; g
Processing temperature: -5 … +40 °C;
Continuous operating temperature: -35 … +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ? 105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454432041;
Customs tariff number: 85366990990;
Pret: 10,01 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/device-connector-3-pole-cod-a-plug-module-with-locking-lever-white-141881