
www.MATERIALE ELECTRICE.ro
Consiliere specializata

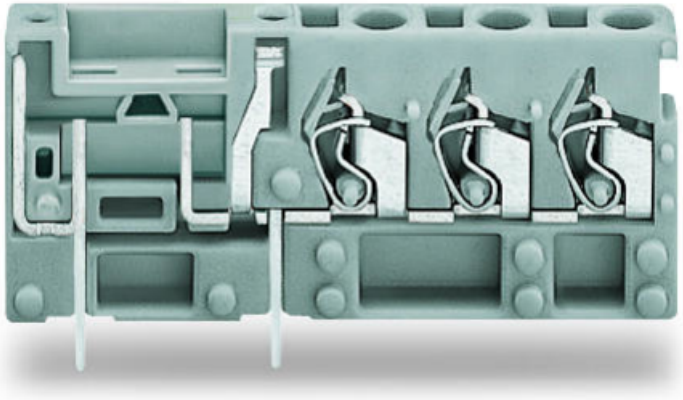

WAGO STACKABLE 3-CONDUCTOR PCB TERMINAL BLOCK; WITH FUSE MOUNTING; 2.5 MM²; PIN SPACING 5 MM; 1-POLE; CAGE CLAMP®; 2,50 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Ratings (note): Individual arrangement;
Tesiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tesiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 15; A
Nominal current (individual arrangement): 15; A
Nominal current (block arrangement): 10; A
Ratings per: IEC/EN 60664-1;
Ratings (note) 2: Block arrangement;
Tensiune nominala (III/3) 2: 320; V
Tensiune nominala de supratensiune (III/3) 2: 4; kV
Tensiune nominala (III/2) 2: 320; V
Tensiune nominala de supratensiune (III/2) 2: 4; kV
Tensiune nominala (II/2) 2: 630; V
Tensiune nominala de supratensiune (II/2) 2: 4; kV
Curent nominal 2: 10; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;

Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0,08 … 2,5 mm² / 28 … 12 AWG;
Fine-stranded conductor: 0,08 … 2,5 mm² / 28 … 12 AWG;
Fine-stranded conductor; with insulated ferrule: 0,25 … 1,5 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,25 … 1,5 mm²;
Strip length: 6 … 7 mm / 0.24 … 0.28 inch;
Conductor connection direction to PCB: 90; °
Numar poli: 1;
Numar total de conexiuni: 3;
Total number of potentials: 1;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Note (conductor cross-section): 12 AWG: THHN, THWN;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 7 mm / 0.276 inch;
Inaltime: 27,2 mm / 1.071 inch;
Inaltime de la fata: 23,2 mm / 0.913 inch;
Adancime: 53,2 mm / 2.094 inch;
Lungimea pinului de contact: 4; mm
Solder pin dimensions: 1 x 0,8 mm;
Diametrul de gaurire cu toleranta: 1,4 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: within the terminal block (in-line);
Number of solder pins per potential: 2;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,107; MJ
Greutate: 6,6; g
Temperatura lucru: -60 … +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4045454232221;
Customs tariff number: 85369010000;
Pret: 13,23 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/stackable-3-conductor-pcb-terminal-block-with-fuse-mounting-2-5-mm2-pin-spacing-5-mm-1-pole-cage-clamp-2-50-mm2-gray-142178