
www.MATERIALE ELECTRICE.ro
Consiliere specializata

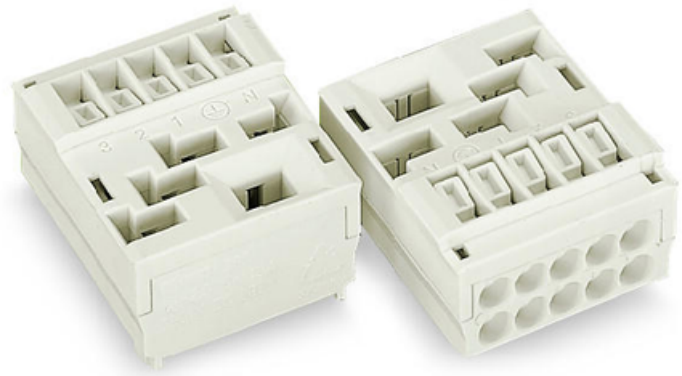

WAGO CONDUCTOR SUPPORT; WITH DIRECT GROUND CONTACT; 5-POLE; 2,50 MM²; WHITE

Tensiune nominala (III/2): 500; V
Tensiune nominala de supratensiune (III/2): 4; kV
Curent nominal: 16; A
Curent nominal 2: 6; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Strip length: 11 … 12 mm / 0.43 … 0.47 inch;
Numar poli: 5;
Numar tipuri de conexiuni: 1;
Latime: 39.1 mm / 1.539 inch;
Inaltime de la fata: 19 mm / 0.748 inch;
Culoare: white;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,111; MJ
Greutate: 19,9; g
Temperature stability: 105; °C
Product Group: 8 (Misc. Chassis Mount Blocks);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4045454415433;
Customs tariff number: 85369010000;

Pret: 20,94 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/conductor-support-with-direct-ground-contact-5-pole-2-50-mm2-white-142706