
www.MATERIALE ELECTRICE.ro
Consiliere specializata

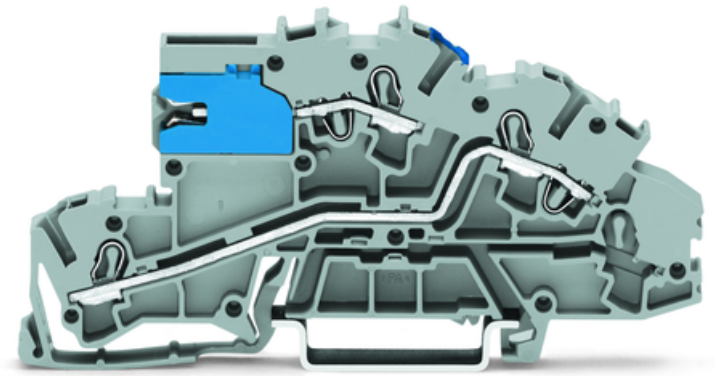

WAGO MULTILEVEL INSTALLATION TERMINAL BLOCK; 4 MM²; WITH N-DISCONNECT SLIDE LINK; NT/L; PUSH-IN CAGE CLAMP®; 2,50 MM²; GRAY

Ratings (note): Potential – ground;
Tesiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 32; A
Ratings (note) 2: Potential – potential;
Tensiune nominala (III/3) 2: 400; V
Tensiune nominala de supratensiune (III/3) 2: 6; kV
Curent nominal 2: 32; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 2,5 mm²;
Solid conductor: 0,25 … 4 mm² / 22 … 12 AWG;
Solid conductor; push-in termination: 0,75 … 4 mm² / 18 … 12 AWG;
Fine-stranded conductor: 0,25 … 4 mm² / 22 … 12 AWG;
Fine-stranded conductor; with insulated ferrule: 1 … 2,5 mm² / 18 … 12 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 1 … 2,5 mm² / 18 … 12 AWG;
Strip length: 10 … 12 mm / 0.39 … 0.47 inch;
Numar total de conexiuni: 3;
Total number of potentials: 2;
Numar nivele: 3;
Wiring type: Front-entry wiring;
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.;
Latime: 5,2 mm / 0.205 inch;

Inaltime from upper-edge of DIN-rail: 42,3 mm / 1.665 inch;
Adancime: 96 mm / 3.78 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Potential marking: NT/L;
Marking level: Center/side marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Fire load: 0,252; MJ
Greutate: 14,2; g
Product Group: 22 (TOPJOB S);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454792695;
Customs tariff number: 85365080900;
Pret: 14,66 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/multilevel-installation-terminal-block-4-mm2-with-n-disconnect-slide-link-nt-l-push-in-cage-clamp-2-50-mm2-gray-143496