
www.MATERIALE ELECTRICE.ro
Consiliere specializata

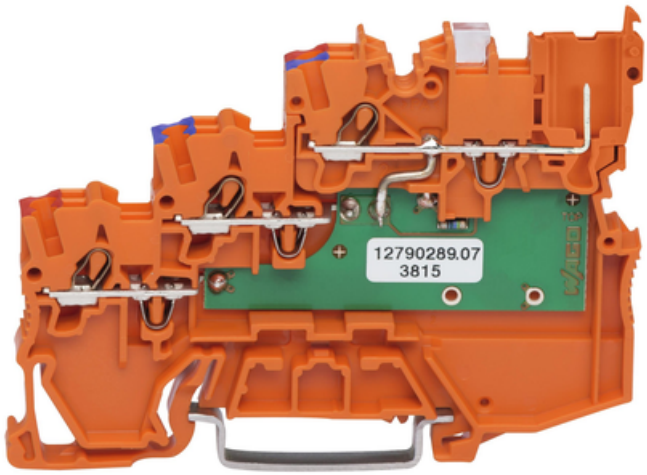

WAGO 3-CONDUCTOR SENSOR SUPPLY TERMINAL BLOCK; LED (GREEN); WITH PLUGGABLE SIGNAL LEVEL; 1 MM²; PUSH-IN CAGE CLAMP®; 1,00 MM²; ORANGE

Voltage type 1: DC;
Tesiune nominala: 24; V
Curent nominal: 13,5; A
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 15; A
Tensiune nominala UL (Use Group C): 300; V
Curent nominal UL (Use Group C): 15; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 15; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group C): 24; V
Curent nominal CSA (Use Group C): 10; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 1 mm²;
Solid conductor: 0.14 … 1.5 mm² / 24 … 16 AWG;
Solid conductor; push-in termination: 0.5 … 1.5 mm² / 20 … 16 AWG;
Fine-stranded conductor: 0.14 … 1.5 mm² / 24 … 16 AWG;
Fine-stranded conductor; with insulated ferrule: 0.5 … 0.75 mm² / 20 … 18 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 0.5 … 0.75 mm² / 20 … 18 AWG;
Strip length: 9 … 11 mm / 0.35 … 0.43 inch;
Numar total de conexiuni: 6;
Total number of potentials: 4;
Numar nivele: 1;
Wiring type: Front-entry wiring;

Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.;
Latime: 7 mm / 0.276 inch;
Inaltime from upper-edge of DIN-rail: 52.4 mm / 2.063 inch;
Adancime: 81.1 mm / 3.193 inch;
Design: horizontal;
Tip montaj: DIN-35 rail;
Marking level: Center/side marking;
Culoare: orange;
Material izolator: Polyamide 66 (PA 66);
Greutate: 16,1; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143523837;
Customs tariff number: 85369010000;
Pret: 78,59 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/3-conductor-sensor-supply-terminal-block-led-green-with-pluggable-signal-level-1-mm2-push-in-cage-clamp-1-00-mm2-orange-144629