
www.MATERIALE ELECTRICE.ro
Consiliere specializata

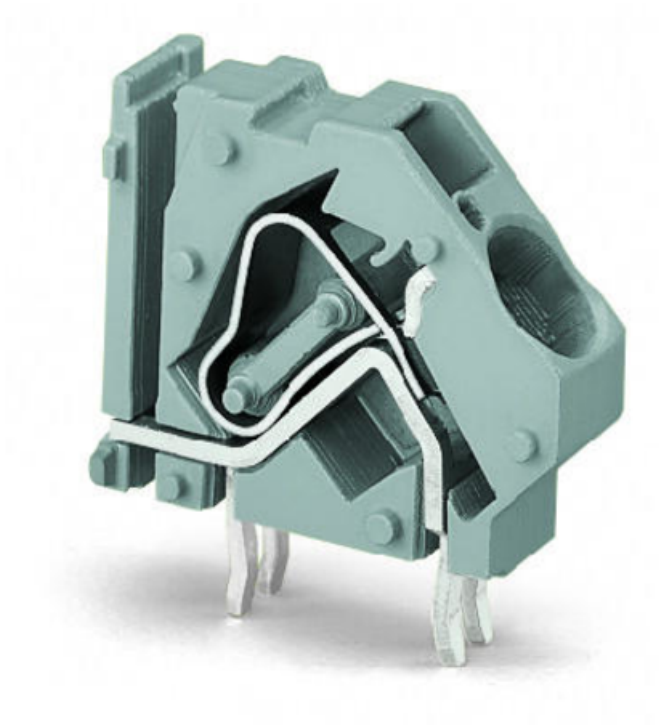

WAGO STACKABLE PCB TERMINAL BLOCK; 16 MM²; PIN SPACING 10 MM; 1-POLE; SUITABLE FOR EX-I APPLICATIONS; CAGE CLAMP®; COMMONING OPTION; 16,00 MM²; BLUE

Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tesiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0.2 … 16 mm² / 24 … 6 AWG;
Fine-stranded conductor: 0.2 … 16 mm² / 24 … 6 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 … 10 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 … 10 mm²;
Strip length: 12 … 13 mm / 0.47 … 0.51 inch;

Conductor connection direction to PCB: 45; °
Numar poli: 1;
Numar total de conexiuni: 1;
Total number of potentials: 1;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Number of jumper slots: 1;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 11.5 mm / 0.453 inch;
Inaltime: 33.5 mm / 1.319 inch;
Inaltime de la fata: 27 mm / 1.063 inch;
Adancime: 33.4 mm / 1.315 inch;
Lungimea pinului de contact: 6,5; mm
Solder pin dimensions: 1.2 x 1.6 mm;
Diametrul de gaurire cu toleranta: 2.2 (+0.1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, in line;
Number of solder pins per potential: 4;
Culoare: blue;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,126; MJ
Greutate: 8,9; g
Temperatura lucru: -60 … +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4044918303156;
Customs tariff number: 85369010000;
Pret: 7,36 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/stackable-pcb-terminal-block-16-mm2-pin-spacing-10-mm-1-pole-suitable-for-ex-i-applications-cage-clamp-commoning-option-16-00-mm2-blue-151166