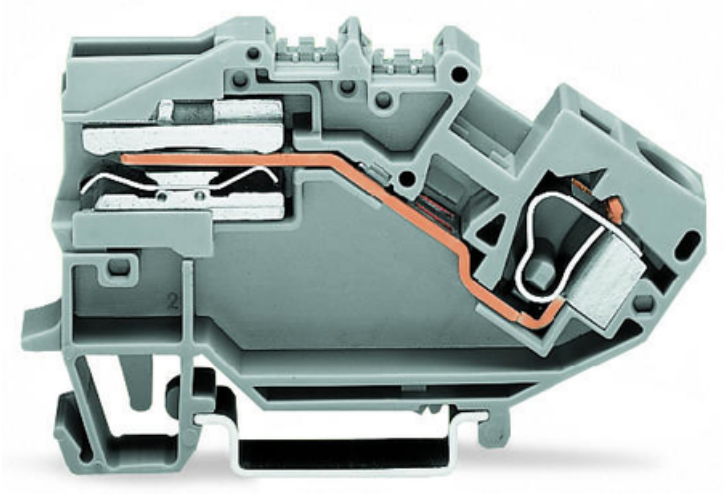

WAGO 1-CONDUCTOR POWER DISTRIBUTION DISCONNECT TERMINAL BLOCK; 10 MM²; CAGE CLAMP®; 10,00 MM²; GRAY

Tesiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 57; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Open Tool Slot;
Connectable conductor materials: Copper;
Solid conductor: 0,2 … 10 mm² / 24 … 8 AWG;
Fine-stranded conductor: 0,2 … 10 mm² / 24 … 8 AWG;
Strip length: 12 … 13 mm / 0.47 … 0.51 inch;
Solid conductor 2: 0,2 … 16 mm² / 24 … 6 AWG;
Fine-stranded conductor 2: 0,2 … 16 mm² / 24 … 6 AWG;
Numar total de conexiuni: 1;
Total number of potentials: 1;
Numar nivele: 1;
Wiring type: Front-entry wiring;
Latime: 10 mm / 0.394 inch;
Inaltime from upper-edge of DIN-rail: 43,5 mm / 1.713 inch;
Adancime: 82,5 mm / 3.248 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Marking level: Center marking;
Culoare: gray;
Greutate: 32,9; g
Product Group: 17 (TOP JOB installation terminal blocks);
Tip ambalare: BOX;

Tara de origine: PL;
GTIN: 4045454016999;
Customs tariff number: 85365080900;
Pret: 21,95 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/1-conductor-power-distribution-disconnect-terminal-block-10-mm2-cage-clamp-10-00-mm2-gray-152027