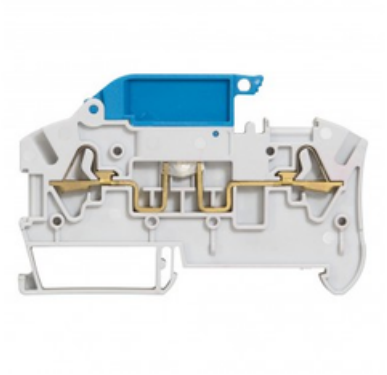


LEGRAND CLEMA SIR VIKING 3 - SPRING - DISCONNECT - PENTRU NEUTRAL CIRCUIT

Caracteristici tehnice
Disconnect terminal blocks 1 connection - 2 wires
Opening by means of blade type lever, handle lever or mini lever (with tool)
For neutral circuit with blue handle lever
Colour : Grey/blue
Nominal cross-section : 2.5 mm²
Capacity - Rigid wire : 0.5 to 2.5 mm²
Capacity – Flexible wire : 0.5 to 2.5 mm²
Flexible wire with ferrule : 0.5 to 2.5 mm²
Pitch : 6 mm
Caracteristici generale
Viking™ 3 terminal blocks with spring connection - for copper cables
Screwless connection system, stainless steel spring type
Used to make the electrical connection between 2 rigid copper wires, or flexible copper wires with or without ferrules
Direct tool-free insertion of a rigid wire or flexible wire with ferrule, up to 6 mm pitch
2 areas for automatic insertion bridging combs (upper level only for 2-level blocks)
For rails depth 15 mm, EN 60715 depth 7.5 mm and 15 mm
Pret: 15,77 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/clema-sir-viking-3-spring-disconnect-pentru-neutral-circuit-224126