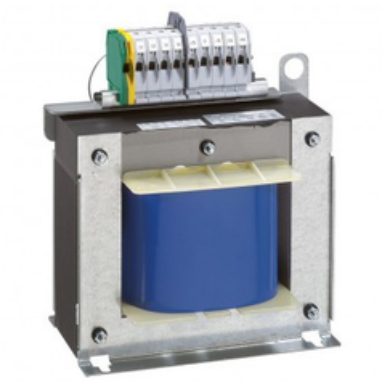


LEGRAND TRANSFORMATOR MONOFAZAT - PRIM 230-400 V / SEC 12-24 V - 1000 VA

Caracteristici tehnice
Safety
Input Tensiune = 230-400 V~ Output Tensiune = 12-24 V~
Putere : 1000 VA
Primary terminal flexible cable : 0.25 to 6 mm²
Secondary terminal flexible cable : 4 to 35 mm²
Caracteristici generale
Equipment transformers - single-phase
IP 2X or XXB up to 450 VA - up to 310 VA in 12-24 V - (coupling strip not mounted) - IK 04
Clip on fixing possibility up to 160 VA with accessories Cat.No 0 044 16 or 0 428 99
Transformers with 2 secondary Tensiune supplied with coupling strip
Transformers up to 450 VA supplied with isolated strip for 0 V connection secondary / earth (except Cat.No 0 428 46)
Conform to IEC EN 61558-2-6 for 12 V, 24 V and 48 V and conform to IEC EN 61558-2-4 for 115 V and 230 V
Products suitable for building equipment conforming to standards EN 61131-2, EN 60204-1 and EN 61 439-1
Pret: 2.892,86 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/transformator-monofazat-prim-230-400-v-sec-12-24-v-1000-va-236812