
Image not found or type

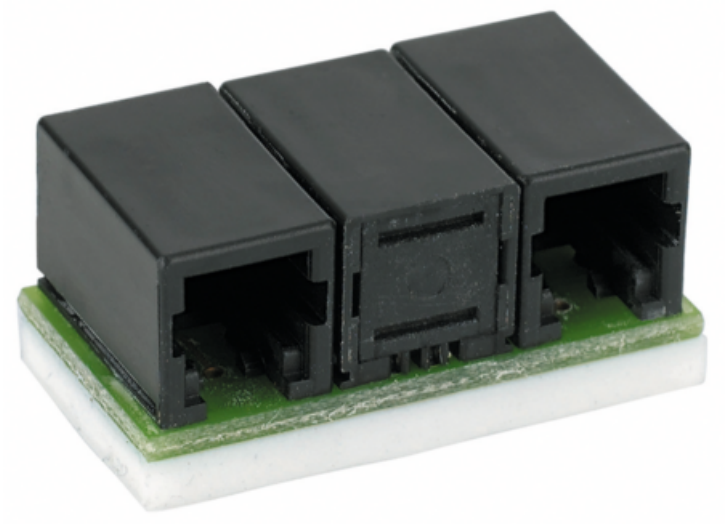

LEDVANCE CONECTOR LEDVANCE (OSRAM) Y-CONNECTOR MULTI3, IP20

Beneficii produs For parallel connection of sensors to a MULTIeco, MULTI 3, DALIeco system Enables synchronization and connection of multiple EASY system components Zone de utilizare Suitable for all OSRAM components with modular 4p4c connector system Caracteristici produs Passive distributor Connections: 3x modular 4p4c socket Type of installation: Adhesive pad mounting on smooth surfaces Echipamente / Accesorii 2 connecting cables included, modular 4p4c connector on both ends, length 2.1 m
DATE ELECTRICE
Putere nominala 1,00 W
Frecventa retea 0 Hz
Dimensiuni si greutate
Lungime 34,00 mm
Latime 18.00 mm
inaltime 16.00 mm
Greutate produs 80,00 g
Capacitati
Reglabil (cu posibilitate de diminuare a intensitatii luminoase) Nu
CERTIFICATE sI STANDARDE
Marci de omologare – aprobare CE
Clasa de protectie III
Tip de protectie IP20
Clasa de eficienta energetica None
FIsa DE PRODUS PRIVIND CARACTERISTICILE sI PERFORMANtELE DE MEDIU
Cantitatea de metale pretioase 0 mg
Cantitatea de pamanturi rare 0 mg
Rata minima de material reciclat din ambalaj 80 % 1)
Procentul minim de continut reciclat din produs 0 % 1)
Reciclabilitatea produsului Produs in mare parte reciclabil 1)
Caracterul reciclabil al ambalajului Ambalaje in mare parte reciclabile 1)

Lista substantelor periculoase cuprinse in produs in concentratii mai mari de 0,1% in procent de masa Nu
Contine substante care prezinta motive de ingrijorare deosebita in concentratii mai mari de 0,1% in procent de masa Nu
1) in conformitate cu Decretul AGEC 2022-748 (Legislatia franceza impotriva deseurilor pentru o economie circulara)
Pret: 132,28 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/conector-ledvance-osram-y-connector-multi3-ip20