www.MATERIALE ELECTRICE.ro
Consiliere specializata

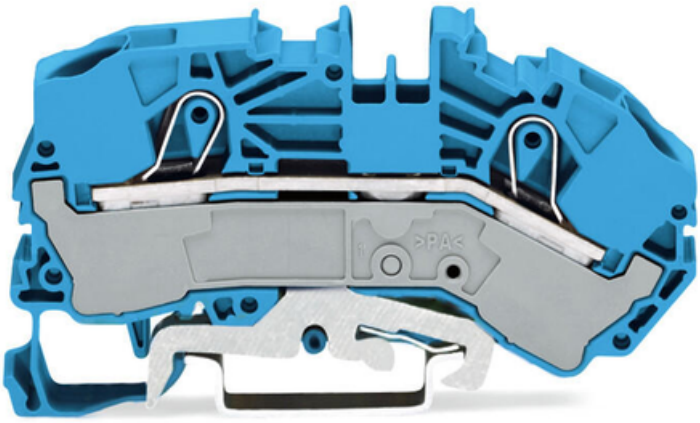

WAGO SPARE SUPPLY TERMINAL BLOCK; 16 MM²; 12 MM; PUSH-IN CAGE CLAMP®; 16,00 MM²; BLUE

Tesiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Curent nominal: 76; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 16 mm²;
Solid conductor: 0,5 … 16 mm² / 20 … 6 AWG;
Solid conductor; push-in termination: 6 … 16 mm² / 14 … 6 AWG;
Fine-stranded conductor: 0,5 … 25 mm² / 20 … 4 AWG;
Fine-stranded conductor; with insulated ferrule: 6 … 16 mm² / 10 … 6 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 6 … 16 mm² / 10 … 6 AWG;
Strip length: 18 … 20 mm / 0.71 … 0.79 inch;
Numar total de conexiuni: 2;
Total number of potentials: 1;
Numar nivele: 1;
Wiring type: Front-entry wiring;
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.;
Number of jumper slots: 2;
Latime: 12 mm / 0.472 inch;
Inaltime from upper-edge of DIN-rail: 40,8 mm / 1.606 inch;
Adancime: 85,7 mm / 3.374 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Marking level: Center/side marking;

Culoare: blue;
Material izolator: Polyamide 66 (PA 66);
Greutate: 43,6; g
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4055143622813;
Customs tariff number: 85369010000;
Pret: 34,94 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/spare-supply-terminal-block-16-mm2-12-mm-push-in-cage-clamp-16-00-mm2-blue-152186