


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

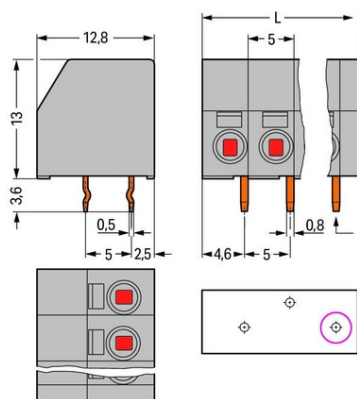

**WAGO 2-CONDUCTOR PCB TERMINAL BLOCK; 1.5 MM²; PIN
SPACING 5 MM; 9-POLE; PUSH WIRE[®]; 1,50 MM²; BLUE**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 17,5; A
Legend (ratings): (III / 2) $\hat{a}\%$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 8; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 8; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 8; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 8; A
Solid conductor: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
Strip length: 8,5 ... 9,5 mm / 0.33 ... 0.37 inch;
Note (strip length): 7 ... 8 mm / 0.28 ... 0.31 inch (for wiring on both sides);
Conductor connection direction to PCB: 0; °
Numar poli: 9;
Connection type 2: PUSH WIRE[®] connection;
Solid conductor 2: 0,5 ... 1,5 mm² / 20 ... 16 AWG;
Strip length 2: 8,5 ... 9,5 mm / 0.33 ... 0.37 inch;
Note (strip length) 2: 7 ... 8 mm / 0.28 ... 0.31 inch (for wiring on both sides);
Conductor connection direction to PCB 2: 90; °
Inaltime: 16,6 mm / 0.654 inch;
Adancime: 12,8 mm / 0.504 inch;
Solder pin dimensions: 0,5 x 0,8 mm;
Diametrul de gaurire cu toleranta: 1,1 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (staggered);
Culoare: blue;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ESu);
Tip ambalare: BOX;
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-pcb-terminal-block-1-5-mm2-pin-spacing-5-mm-9-pole-push-wire-1-50-mm2-blue-136947>