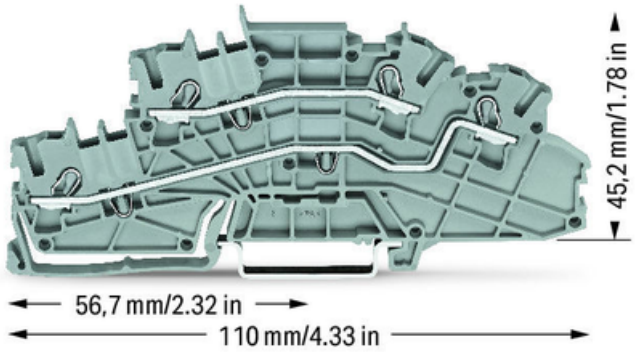


WAGO MULTILEVEL INSTALLATION TERMINAL BLOCK; 4 MM²; L/L; PUSH-IN CAGE CLAMP®; 2,50 MM²; GRAY

Tesiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 24; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 20; A
Tensiune nominala UL (Use Group C): 300; V
Curent nominal UL (Use Group C): 20; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group C): 300; V
Curent nominal CSA (Use Group C): 20; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 2,5 mm²;
Solid conductor: 0,25 … 4 mm² / 22 … 12 AWG;
Solid conductor; push-in termination: 0,75 … 4 mm² / 18 … 12 AWG;
Fine-stranded conductor: 0,25 … 4 mm² / 22 … 12 AWG;
Fine-stranded conductor; with insulated ferrule: 1 … 2,5 mm² / 18 … 12 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 1 … 2,5 mm² / 18 … 12 AWG;
Strip length: 10 … 12 mm / 0.39 … 0.47 inch;
Numar total de conexiuni: 4;
Total number of potentials: 3;
Numar nivele: 3;
Wiring type: Front-entry wiring;
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-

section can also be inserted via push-in termination.;
Latime: 5,2 mm / 0.205 inch;
Inaltime from upper-edge of DIN-rail: 45,2 mm / 1.78 inch;
Adancime: 110 mm / 4.331 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Potential marking: L/L;
Marking level: Center/side marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Fire load: 0,307; MJ
Greutate: 17,2; g
Product Group: 22 (TOPJOB S);
Tip ambalare: BOX;
Tara de origine: CN;
GTIN: 4050821322047;
Customs tariff number: 85369010000;
Pret: 19,91 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/multilevel-installation-terminal-block-4-mm2-l-l-push-in-cage-clamp-2-50-mm2-gray-141028