
www.MATERIALE ELECTRICE.ro
Consiliere specializata

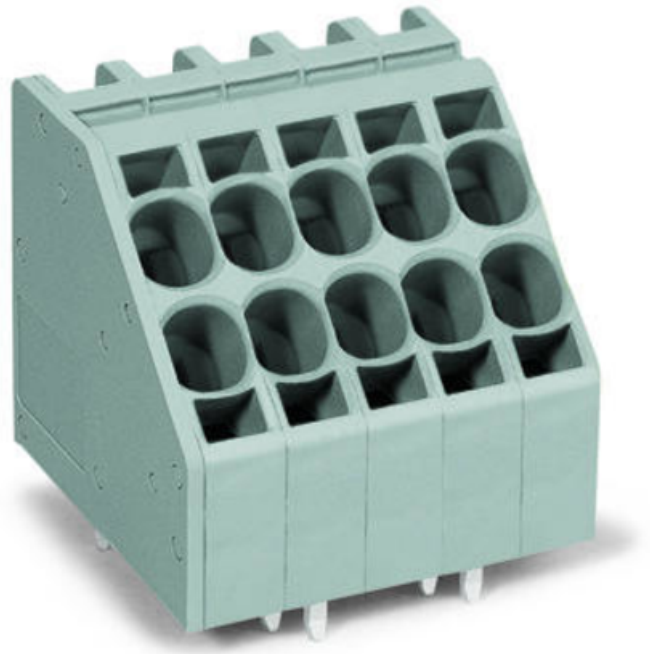

WAGO 2-CONDUCTOR PCB TERMINAL BLOCK; 10 MM²; PIN SPACING 7.5 MM; 8-POLE; SUITABLE FOR EX-I APPLICATIONS; PUSH-IN CAGE CLAMP®; 10,00 MM²; BLUE

Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 8; kV
Tesiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 8; kV
Curent nominal: 50; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 600; V
Curent nominal UL (Use Group B): 50; A
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 50; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 600; V
Curent nominal CSA (Use Group B): 44; A
Tensiune nominala CSA (Use Group C): 600; V
Curent nominal CSA (Use Group C): 44; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0.5 … 10 mm² / 20 … 8 AWG;
Fine-stranded conductor: 0.5 … 10 mm² / 20 … 8 AWG;
Fine-stranded conductor; with insulated ferrule: 0.5 … 6 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.5 … 6 mm²;
Strip length: 13 … 15 mm / 0.51 … 0.59 inch;

Conductor connection direction to PCB: 45; °
Numar poli: 8;
Numar total de conexiuni: 16;
Total number of potentials: 8;
Numar tipuri de conexiuni: 1;
Numar nivele: 2;
Distanta intre pini: 7.5 mm / 0.295 inch;
Latime: 62.7 mm / 2.469 inch;
Inaltime: 41.3 mm / 1.623 inch;
Inaltime de la fata: 36.9 mm / 1.453 inch;
Adancime: 37 mm / 1.457 inch;
Lungimea pinului de contact: 4,4; mm
Solder pin dimensions: 1.6 x 1.2 mm;
Diametrul de gaurire cu toleranta: 2.2 (+0.1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, staggered;
Number of solder pins per potential: 2;
Culoare: blue;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,992; MJ
Greutate: 62,3; g
Temperatura lucru: -60 … +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4050821460657;
Customs tariff number: 85369010000;
Pret: 68,45 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/2-conductor-pcb-terminal-block-10-mm2-pin-spacing-7-5-mm-8-pole-suitable-for-ex-i-applications-push-in-cage-clamp-10-00-mm2-blue-142004