
www.MATERIALE ELECTRICE.ro
Consiliere specializata

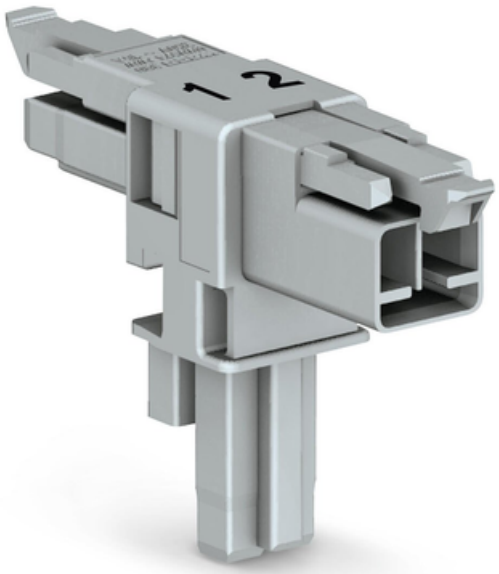

WAGO T-DISTRIBUTION CONNECTOR; 2-POLE; COD. B; 1 INPUT; 2 OUTPUTS; 2 LOCKING LEVERS; GRAY

Note on Contact Resistance: approx. 1 m? of contact resistance approx. 0.25 m? contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 16; A
Legend (ratings): (III / 3) ? Overvoltage category III / Pollution degree 3;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 14; A
Numar poli: 2;
Total number of potentials: 2;
Distanta intre pini: 4,4 mm / 0.173 inch;
Latime: 13,5 mm / 0.531 inch;
Inaltime: 39,65 mm / 1.561 inch;
Adancime: 53,9 mm / 2.122 inch;
Coding: B;
Mating force of a plug-in connection: approx. 20 … 70 N (depending on pole number);
Retention force of a plug-in connection: When locked: > 80 N;
Unmating force of a plug-in connection: when unlocked: approx. 20 … 70 N (depending on pole number);
Number of mating cycles: ?200, without resistive load100, with resistive load IN = 16 A, tested (1.5 mm²/16 AWG);
Distributor type: T-distribution connector;
Marking: 1 2;
Protection type: IP20;
Note on protection type: IP40 when mated;
Potential marking: 1 2;

Tip contact (pluggable connector): Socket/plug;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: yes;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Fire load: 0,124; MJ
Greutate: 5,9; g
Processing temperature: -5 … +40 °C;
Continuous operating temperature: -35 … +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ? 105 °C;
Product Group: 20 (WINSTA);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4050821560043;
Customs tariff number: 85366990990;
Pret: 20,82 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/t-distribution-connector-2-pole-cod-b-1-input-2-outputs-2-locking-levers-gray-144093