
www.MATERIALE ELECTRICE.ro
Consiliere specializata

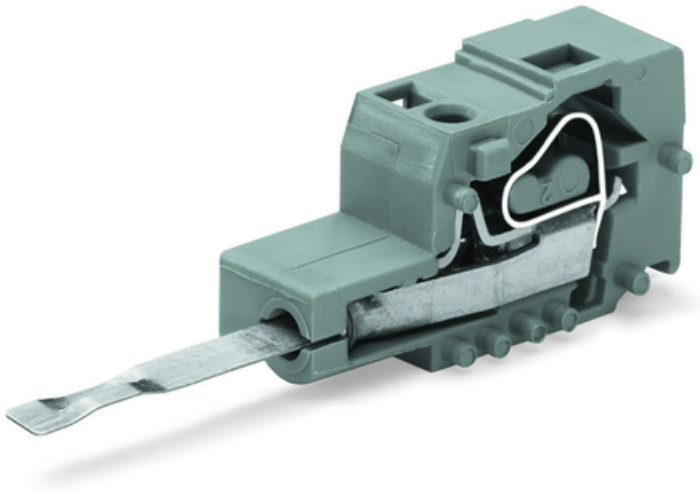

WAGO TESTING PLUG MODULE WITH CONTACT STUD; FOR 736, 737 SERIES; PIN SPACING 7.5 MM / 0.295 IN; 2,50 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/2): 250; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Curent nominal: 0,5; A
Legend (ratings): (III / 2) ? Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tehnologie conexiune: CAGE CLAMP®;
Solid conductor: 0,08 … 2,5 mm² / 28 … 12 AWG;
Fine-stranded conductor: 0,08 … 2,5 mm² / 28 … 12 AWG;
Strip length: 12 … 13 mm / 0.47 … 0.51 inch;
Numar total de conexiuni: 1;
Total number of potentials: 1;
Numar tipuri de conexiuni: 1;
Distanta intre pini: 7,5 mm / 0.295 inch;
Latime: 7,5 mm / 0.295 inch;
Inaltime: 14,3 mm / 0.563 inch;
Adancime: 44,45 mm / 1.75 inch;
Test contact length: 18; mm
Application: Testing wired terminal blocks with 0.75 …1.5 mm² “f-st” or 0.5 mm² “sol.” conductors;
Suitable: for 736, 737 Series;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);

Contact plating: tin-plated;
Greutate: 2,2; g
Temperatura lucru: -60 … +105 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: DE;
Customs tariff number: 85366990990;
Pret: 19,57 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/testing-plug-module-with-contact-stud-for-736-737-series-pin-spacing-7-5-mm-0-295-in-2-50-mm2-gray-146822