www.MATERIALE ELECTRICE.ro
Consiliere specializata

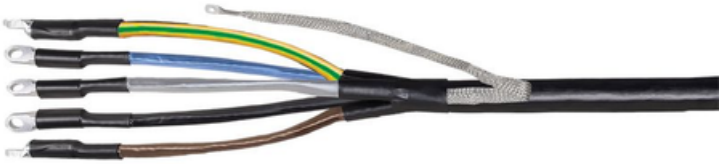

IEK TERMOCONTRACTIBIL PKVTPBE 5X35/50 WITH PVC ISOLATION 1KV

PKV(N)tpbe-1 and PKVtpbe-1 heat-shrink sleeves are designed for termination of aluminum or copper conductors of cables with plastic, rubber and polyethylene insulation with armor or shield for voltages up to 1 kV: AVBbShv-1, VBbShv-1, AVVB-1, AVVBG-1, VVB-1, VVBG-1, APvBbShv-1, PvBbShv-1, VVGE, AVVGE, PvVGE, APvVGE, their equivalents and versions. The product's range is developed for 1-, 2-, 3-, 4- and 5-core cables.The sleeve can be used with armored and shielded cables and includes a kit of soldered or not soldered grounding options. The soldered grounding kit contains constant force springs (CFS) made from high-quality stainless steel AISI 301 with high content of chromium and nickel, that ensure reliable and safe connection of PML grounding bus to cable armor bands.
Use of high-quality two-layer heat-shrink materials with adhesive thermomelting coating on inner surfaces of tubes and multiple cable joints ensures perfect tightness of the sleeve construction.Suitable for: EV009707
Model: EV004267
Voltage row: EV004258
Nominal cross section: 35...50
Type of insulation material: IEK_V0000184
Installation Type: IEK_V0000185
Complete set: IEK_V0000188
Number of cores wiring: 5
Tip Type: IEK_V0000190
Attachment of the grounding bus to the cable: IEK_V0000192
Nominal voltage: 1
Material: IEK_V0000193
Min full shrinkage temperature: 120
Operating temperature range: -45...+50
Shrink rate: EV009535
External grounding bus attachment: IEK_V0000194
Number of conductors: 5
Pret: 164,44 LEI (TVA inclus)

Detalii online: https://www.materialeelectrice.ro/termocontractibil-pkvtpbe-5x35-50-with-pvc-isolation-1kv-310586